


# Phenomen 61

*Present Weather Detector Multi Sensor Kit*

**Revolutionary compilation of industry-proven devices, Phenomen 61 is a highly reliable choice for WMO 4680 table weather codes detection.**

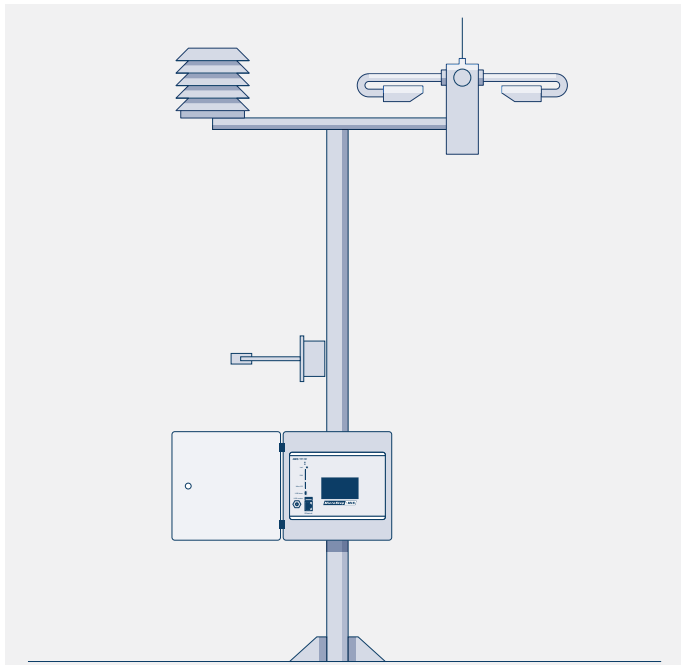

**Data Logger AMS 111**



**Humidity and Temperature Probe**



**Laser Precipitation Monitor**



**Visibility Sensor**



**Low power consumption**



**Robust build**



**Measurement of solid and liquid precipitation**



**Amount of new snow measurement**



**Accurate visibility measurement**

## Typical Applications

- » Professional automatic weather stations
- » Airport weather observation systems
- » Hydrological and road weather systems
- » Scientific research

### Phenomen 61 involves:

- Visibility sensor
- Disdrometer
- Relative humidity and temperature sensor
- MicroStep-MIS' advanced Weather Processing Algorithm technology incorporated into the IMS4 application software (installations with PC) or into the AMS 111 Data Logger (installations without PC)

The selected combination of sensors enables the Phenomen 61 system to ensure stable, reliable, and accurate measurement of the following parameters:

- Visibility (up to 40 000 m) and visibility related phenomena
- Liquid and solid precipitation, precipitation intensity

**Multi sensor kit Phenomen 61 is a result of more than 10 years of MicroStep-MIS' experience with the visibility and present weather sensors. The Phenomen 61 brings:**

- Highly competitive price
- Low maintenance requirements
- Robustness and resistance to windy and extreme environment conditions
- Low power consumption < 8 W and weight < 9 kg

## Technical specification

### Operating conditions

<b>IP Protection</b>	IP 66
<b>Operating temperature</b>	-40 °C to +65 °C
<b>Storage temperature</b>	-40 °C to +80 °C
<b>Operating humidity</b>	0 % to 100 %RH
<b>Output</b>	RS-232 / RS-485

### Power supply

<b>Voltage</b>	10.5 V to 16 V DC (Higher range available on request)
<b>Voltage for heating</b>	24 V AC ±15 %
<b>Consumption max</b>	9 W
<b>Consumption middle</b>	5 W
<b>Consumption with heating</b>	80 W

### Relative humidity measurement

<b>Sensor</b>	RHT175 Relative Humidity and Temperature Probe
<b>Measurement range</b>	0 % to 100 %RH
<b>Resolution</b>	0.1 %RH
<b>Accuracy (@ 23 °C)</b>	±1.8 %RH

### PT100 Temperature Probe

<b>Accuracy class</b>	PT100 1/5 DIN: ±0.10 °C
<b>Resolution</b>	0.01 °C
<b>Measurement range</b>	-50 °C to +70 °C
<b>Recommended current</b>	2 mA max.

### Visibility sensor

<b>Sensor</b>	Forward scatter meter with 39° to 51° angle
<b>Measurement range</b>	10 m to 40 km (optional: 10 m to 75 km) resolution 10 m
<b>Accuracy</b>	<ul style="list-style-type: none"> <li>≤ 4.5 % at 600 m</li> <li>≤ 5.0 % at 1 500 m</li> <li>≤ 5.1 % at 2 km</li> <li>≤ 12.5 % at 15 km</li> <li>≤ 20 % at 30 km</li> </ul>

### Disdrometer

<b>Sensor</b>	<ul style="list-style-type: none"> <li>• 785 nm laser, max. 0.5 mW</li> <li>• class 1M</li> <li>• Classification into 440 classes (22 Ø × 20 speed)</li> <li>• DSP technology</li> </ul>
<b>Measurement volume</b>	46 cm <sup>2</sup>
<b>Measurement</b>	<ul style="list-style-type: none"> <li>• Particle size 0.16 mm to 8 mm</li> <li>• Particle speed 0.2 m/s to 20 m/s</li> <li>• Precipitation intensity 0.005 mm/h to 250 mm/h</li> </ul>
<b>Distinction for kind of precipitation - drizzle, rain, hail, snow</b>	≥ 97 % (compared to synoptic observer)

**Detected weather codes** (WMO 4680)

<b>00</b>	No significant weather observed
<b>04</b>	Haze or smoke, or dust in suspension in the air, visibility equal to, or greater than 1 km
<b>05</b>	Haze or smoke, or dust in suspension in the air, visibility less than 1 km
<b>10</b>	Mist
<b>20</b>	Fog*
<b>21</b>	Precipitation*
<b>22</b>	Drizzle (not freezing) or snow grains*
<b>23</b>	Rain (not freezing)*
<b>24</b>	Snow*
<b>25</b>	Freezing rain or freezing drizzle*
<b>30</b>	Fog
<b>31</b>	Fog or ice fog, patches
<b>32</b>	Fog or ice fog, has become thinner during the past hour
<b>33</b>	Fog or ice fog, no appreciable change during the past hour
<b>34</b>	Fog or ice fog, has begun or become thicker during the past hour
<b>35</b>	Freezing fog
<b>40</b>	Precipitation
<b>41</b>	Precipitation, slight or moderate
<b>42</b>	Precipitation, heavy
<b>43</b>	Liquid precipitation, slight or moderate
<b>44</b>	Liquid precipitation, heavy
<b>45</b>	Solid precipitation, slight or moderate
<b>46</b>	Solid precipitation, heavy
<b>47</b>	Freezing precipitation, slight or moderate
<b>48</b>	Freezing precipitation, heavy
<b>50</b>	Drizzle
<b>51</b>	Drizzle, not freezing, slight
<b>52</b>	Drizzle, not freezing, moderate
<b>53</b>	Drizzle, not freezing, heavy
<b>54</b>	Drizzle, freezing, slight
<b>55</b>	Drizzle, freezing, moderate
<b>56</b>	Drizzle, freezing, heavy
<b>57</b>	Drizzle and rain, slight
<b>58</b>	Drizzle and rain, moderate or heavy
<b>60</b>	Rain
<b>61</b>	Rain, not freezing, slight
<b>62</b>	Rain, not freezing, moderate
<b>63</b>	Rain, not freezing, heavy
<b>64</b>	Rain, freezing, slight
<b>65</b>	Rain, freezing, moderate
<b>66</b>	Rain, freezing, heavy
<b>67</b>	Rain (or drizzle) and snow, light

\* Codes 20 to 25 are used to report precipitation or fog at the station during the preceding hour but not at the time of observation

68	Rain (or drizzle) and snow, moderate or heavy
70	Snow
71	Snow, light
72	Snow, moderate
73	Snow, heavy
74	Ice pellets, slight
75	Ice pellets, moderate
76	Ice pellets, heavy
77	Snow grains
80	Showers or intermittent precipitation
81	Rain showers, slight
82	Rain showers, moderate
83	Rain showers, heavy
84	Rain showers, violent (>32 mm/h)
85	Snow showers, slight
86	Snow showers, moderate
87	Snow showers, heavy
88	Soft hail (reserved in the WMO table)
89	Hail

Phenomen 61 options	Sensors included	Present weather algorithms processing	Order CODE
<b>Standalone device</b>	<ul style="list-style-type: none"> <li>• Visibility Sensor</li> <li>• Disdrometer (Laser Precipitation Monitor)</li> <li>• Temperature &amp; Humidity Sensor RHT175</li> <li>• Thermometer PT100 for metal-surface temperature</li> </ul>	<ul style="list-style-type: none"> <li>• Data logger included</li> <li>• Data processing in data logger</li> </ul>	P61-SO
<b>Partially integrated in the IMS4 AWOS Automated Weather Observation System</b>	<ul style="list-style-type: none"> <li>• Visibility sensor and disdrometer (Laser Precipitation Monitor) / (IMS4 AWOS provides temperature &amp; humidity values)</li> </ul>	<ul style="list-style-type: none"> <li>• No data logger</li> <li>• Data processing in the IMS4 AWOS software</li> </ul>	P61-PI
<b>Fully integrated in the IMS4 AWOS Automated Weather Observation System</b>	<ul style="list-style-type: none"> <li>• none (IMS4 AWOS provides all necessary values)</li> </ul>	<ul style="list-style-type: none"> <li>• No data logger</li> <li>• Data processing in the IMS4 AWOS software</li> </ul>	P61-IMS/SW